



# STORM MEDIUM BASE 25 CC



## STORM SYSTEM®

The Storm Medium Base is part of the STORM SYSTEM® MEDIUM collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

Storm Medium Base is designed to hold any of the Storm Medium Base Tubes. The expression of the spot can easily be changed simply by changing the tube. The light fixture can rotate 360° and allows a 25° adjustment along the longitudinal axis. The Base and Tubes are available in a variation of colours and materials.



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact [info@onea.dk](mailto:info@onea.dk)

## DATA

Collection	STORM SYSTEM®
Product	Storm Medium Base – Constant Current
Article no.	1N01.0173.xx04

## SPECIFICATIONS

Weight	10.6 oz / 21.2 oz
Material	Aluminium / Brass (varnished or weathered)
IP protection grade	IP20
Labelling	



Conforms to ANSI/UL  
Std. UL 2108:2015

Cert. to CAN/CSA  
Std. CSA C22.2#250.13:2017

**Intertek**  
5005519

Safety distance	0,3m
Supply	Constant Current max. rating 11W
Insulation class	Class III
Fixture finish	For xx-codes review STORM SYSTEM® – COLOUR CODES ➤

## ADDITIONAL REQUIREMENTS

Light Source & Junction Kit	MR16 LED (light source not included) review STORM SYSTEM® – CONFIGURATION ➤
	For IES/LDT lux files review STORM SYSTEM® – LUX FILES ➤
	NOTE: when using honey combs the lumen output will be reduced with 30% in efficiency

This product shall always be powered by SELV LED driver, output voltage of this driver in open circuit must not exceed 60V. Do NOT cover the LED driver or locate LED driver on top of light fixture.

For further support contact LITES ON WEST  
245 West 29th Street, 6th floor | NY, NY 10001  
T: 212 775 6363 | F: 212 775 0355  
E: [info@litesonwest.com](mailto:info@litesonwest.com)

Storm Medium Base Tube	Glass – 1AK.0006.xx Wood – 1AK.0007.xx Metal – 1AK.0019.xx Concrete – 1AK.0031.55
------------------------	--

## INSTALLATION DEPTH

The installation depth may vary depending on the chosen light source.

For specific light source conditions  
– review STORM SYSTEM® – INSTALLATION DEPTH ➤

# STORM MEDIUM BASE TUBE GLASS

## DATA

Collection	STORM SYSTEM®
Product	Storm Medium Base Tube Glass
Article no.	1AK.0006.xx

## SPECIFICATIONS



Weight	5.29 oz
Materials	Glass and aluminium
Tube finish	For xx-codes review STORM SYSTEM® – COLOUR CODES ➤



## STORM SYSTEM®

The Storm Medium Base Tube Glass is part of the STORM SYSTEM® MEDIUM collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

The Storm Medium Base Tube Glass is designed to be attached to the Storm Medium Base. The expression of the spot can be changed simply by changing the tube.



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact [info@onea.dk](mailto:info@onea.dk)

# STORM MEDIUM BASE TUBE WOOD

## DATA

Collection	STORM SYSTEM®
Product	Storm Medium Base Tube Wood
Article no.	1AK.0007.xx



## SPECIFICATIONS

Weight	3.53 oz
Materials	Wood and aluminium
Tube finish	For xx-codes review STORM SYSTEM® – COLOUR CODES ➤

## STORM SYSTEM®

The Storm Medium Base Tube Wood is part of the STORM SYSTEM® MEDIUM collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

The Storm Medium Base Tube Wood is designed to be attached to the Storm Medium Base. The expression of the spot can be changed simply by changing the tube.



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact [info@onea.dk](mailto:info@onea.dk)

# STORM MEDIUM BASE TUBE METAL

## DATA

Collection	STORM SYSTEM®
Product	Storm Medium Base Tube Metal
Article no.	1AK.0019.3x

## SPECIFICATIONS



Weight	21.2 oz
Materials	Aluminium and Brass (varnished or weathered)
Tube finish	For xx-codes review STORM SYSTEM® – COLOUR CODES ➤



## STORM SYSTEM®

The Storm Medium Base Tube Metal is part of the STORM SYSTEM® MEDIUM collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

The Storm Medium Base Tube Metal is designed to be attached to the Storm Medium Base. The expression of the spot can be changed simply by changing the tube.



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact [info@onea.dk](mailto:info@onea.dk)

# STORM MEDIUM BASE TUBE CONCRETE

## DATA

Collection	STORM SYSTEM®
Product	Storm Base Tube Concrete
Article no.	1AK.0031.55

## SPECIFICATIONS


Weight	6.63 oz
Materials	Concrete
Tube finish	Concrete



## STORM SYSTEM®

The Storm Medium Base Tube Concrete is part of the STORM SYSTEM® MEDIUM collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

The Storm Medium Base Tube Concrete is designed to be attached to the Storm Medium Base. The expression of the spot can be changed simply by changing the tube.



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal.

For more information, please contact [info@onea.dk](mailto:info@onea.dk)

#### IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed.

Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

#### CLEANING AND MAINTENANCE:

Use a soft moist cloth for cleaning. No further maintenance is required.


**NOTE: ONLY USE A DRY CLOTH FOR CLEANING ON BRASS FIXTURES!**

#### WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

#### COMPONENTS

- Storm Medium Base Tube
- Retaining ring
- Storm Medium Base
- Storm Medium Base Tube (sold separately)
- Light kit (sold separately)

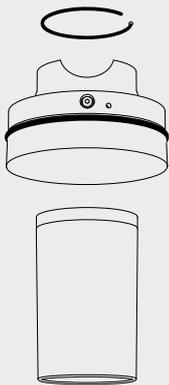

#### PLEASE NOTE:


If the spring on the fixture is damaged, do not proceed installation – contact your dealer!

## STORM MEDIUM BASE 25

### ASSEMBLY INSTRUCTION


#### STEP 1

**Make sure main power is off!**  
Mount the chosen Junction Kit



#### STEP 2


Place the bulb in the fixture and mount the retaining ring using light pressure.



#### STEP 3


Mount the fixture into the plaster ring/back-mounted ring. Do this by slightly rotating the fixture into place.

**NOTE:** When rotating the fixture choose the direction with the least resistance.



#### STEP 4

Mount the chosen Storm Base Tube, by gently rotating the tube into place.

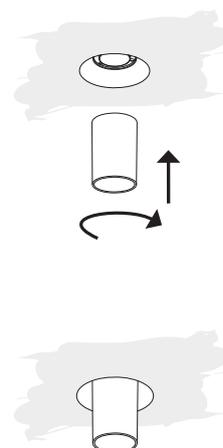

#### IMPORTANT INFORMATION

Disassembly must be performed by a certified electrician only, and instructions must be followed.

#### WARRANTY:


If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

## STORM MEDIUM BASE 25

### DISASSEMBLY INSTRUCTION

#### STEP 1


**Make sure main power is off!**  
Remove the Storm Base Tube by slightly rotating out of place.



#### STEP 2


Take hold of the fixture and pull down gently, whilst slightly rotating.

NOTE: When rotating the fixture choose the direction with the least resistance.



#### STEP 3

Remove the retaining ring using light pressure.



#### STEP 4

Disconnect the cables.

