

Insert 00 - Round Adjustable 700

REF : IN000-R7


RECESSED

EN



↓ PRODUCT DESCRIPTION

This round mini recessed LED is specifically designed for precision and accent lighting. It combines high-quality lighting with efficiency and reliability. Its excellent performance and sleek, miniaturized design make it very easy to fit in shop windows, display units, and small spaces.

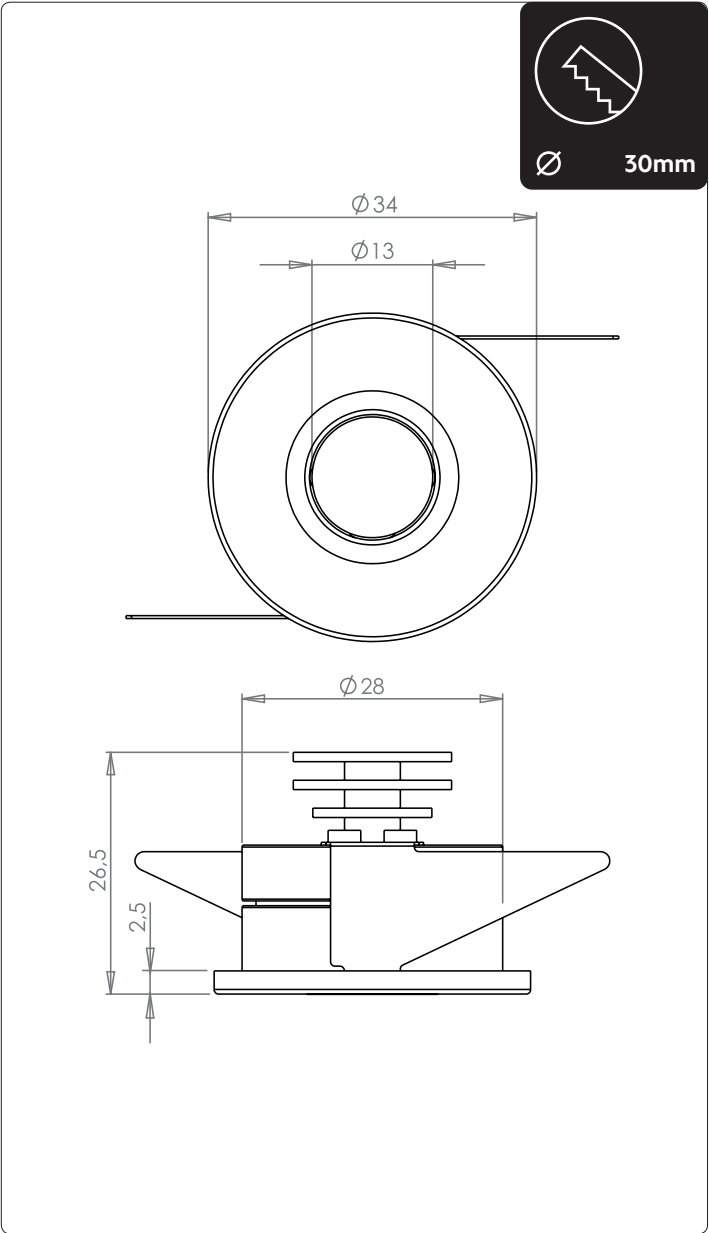

↓ OUTPUT

2,1W

↓ POWER SUPPLY

700mA

↓ IP RATING

IP 40

↓ STANDARDS COMPLIANCE

EN 62471 EN 60598-1 EN 60598-2 CE III

Insert 00 - Round Adjustable 700

REF : IN000-R7

RECESSED

EN

↓ SOURCES

- Luminous flux according to Bining: 200 lumens;
- Colour temperature: 2400K to 5000K;
- Service Range: 70 % of nominal flux after 25 000 hours;
- Colour Rendering Index: CRI 80 or CRI 90.

↓ OPTICAL CHARACTERISTICS

- PMMA acrylic lens, efficiency ~90 %;
- Available degrees: 16°, 24°, 40° & Elliptic.

↓ ELECTRICAL CHARACTERISTICS

- Constant current supply: 700 mA;
- Supply connection: Polarised output connectors;
- Power consumption to 2.1W max, excluding supply;
- Electrical Classification: Class III SELV device.

↓ MECHANICAL CHARACTERISTICS

- Dimensions: Diameter 34 mm, Overall Height 26.5 mm;
- Weight: 36 gr;
- Adjustable to a total angle of 40°;
- Operating temperature: -5° +40°;
- ROHS components;
- Interior use only.

↓ SPECIFICITIES

- Electrolytic treatment available;
- 3 years guarantee.

↓ CLASSIFICATION

Product Ref.		IN000			
Specification			R7		
Colori	Black			BK	
	White			WH	
	Aluminium			AL	
	Chromium			CU	
	Gold			CU	
	RAL			CU	
Colour temperature	2400K				24
	2700K				27
	3000K				30
	3500K				35
	4000K				40
	5000K				50
Degrees	16°				16
	24°				24
	40°				40
	Elliptique				EL
REFERENCE		IN000 - R7 - BK - 24 - 16			