





STORM SYSTEM®

The Storm Medium Output is part of the STORM SYSTEM® MEDIUM collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

Storm Medium Output is designed to integrate the canopy into the ceiling. A beautiful way to install and fasten your pendants. The wire disappears elegantly into the ceiling.



STORM MEDIUM OUTPUT

DATA

Collection	STORM SYSTEM®
Product	Storm Output
Article no.	1A01.0500.xx

SPECIFICATIONS

Weight	12.3 oz / 35.3 oz
Material	Aluminium / Brass (varnished or weathered)
IP protection grade	IP20
Load	See installation ring's datasheet
Fixture finish	For xx-codes review STORM SYSTEM® – COLOUR CODES >

ADDITIONAL REQUIREMENTS

Junction Kit (not included)	For further support contact LITES ON WEST 245 West 29th Street, 6th floor NY, NY 10001 T: 212 775 6363 F: 212 775 0355 E: info@litesonwest.com
-----------------------------	---

NOTE


By installation of pendants it is important to be aware of pendants load/weight. If your pendant exceeds the specified load – an additional anchor must be completed!

It is very important that the output is anchored in the ceilings construction aswell
Please refer to the installation ring's datasheet.

Pendant cord must be a min. of Ø0.19" mm and a max. of Ø0.39".

Storm Medium Output can be installed in sloped ceilings with an angle up to 45°

INSTALLATION DEPTH

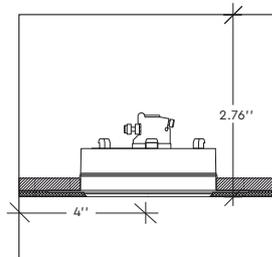

IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed.

Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

CLEANING AND MAINTENANCE:

Use a soft moist cloth for cleaning. No further maintenance is required.


NOTE: ONLY USE A DRY CLOTH FOR CLEANING ON BRASS FIXTURES!

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

COMPONENTS

- Storm Medium Output




STORM MEDIUM OUTPUT

ASSEMBLY INSTRUCTION


STEP 1

Make sure main power is off!
Adjust the length of the cord, leaving the fixture at the desired height.
Fasten the cord properly, and test that the load of the chosen fixture is held in place.

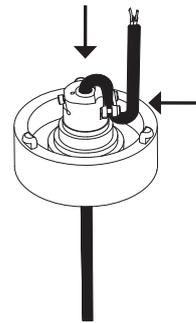


STEP 2

Connect the cables

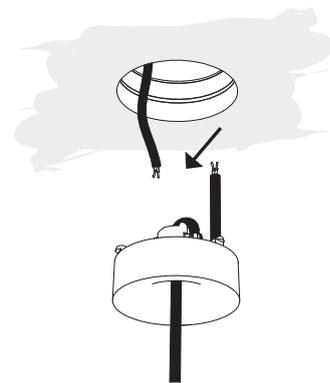


STEP 3

Then mount the fixture into the plaster ring/back-mounted ring.
Do this by slightly rotating the fixture until it locks.

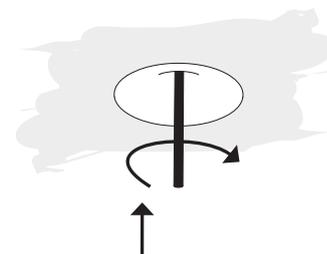

STEP 4


Please ensure that the fixture aligns with the ceiling.

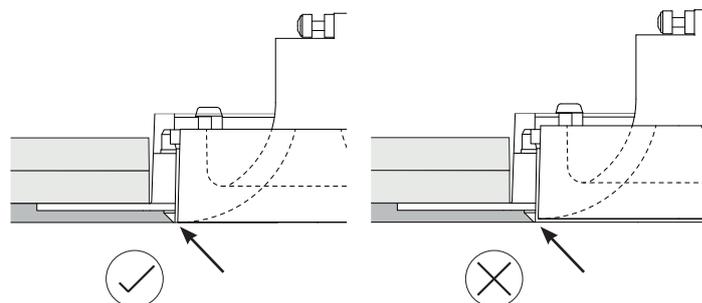

WHEN INSTALLING STORM P350 OR X-TENDABLE

STEP 1

Feed the accompanying steel wire through the small hole in Storm Output, then fasten the screw

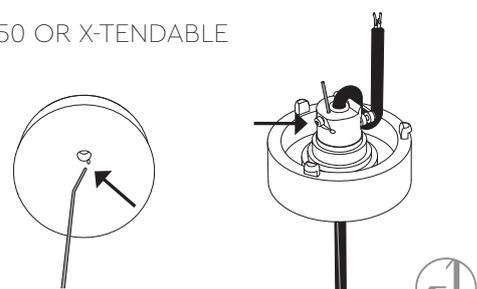

IMPORTANT INFORMATION

Disassembly must be performed by a certified electrician only, and instructions must be followed.


WARRANTY: If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

STORM MEDIUM OUTPUT

DISASSEMBLY INSTRUCTION

STEP 1

Make sure main power is off!
Push the fixture up and rotate slightly, then gently pull down.

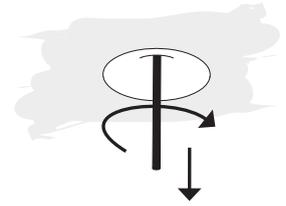

STEP 2

Disconnect the cables

