

# ROUND CONTROL

CEILING/WALL

TYPE:

PROJECT NAME:



## round control

design by glenn marys

Round control is designed as a ceiling- and wall surface mounted system. During the installation, it can be adapted to any architectural concept due to countless variations in the design. The graphic character of the minimalistic design reveals its functions very honestly. Round control is devised for lighting rooms in commercial areas, board rooms and lounge areas as well as residential rooms. The indirect lighting – with high power LED modules - creates a soft and comfortable atmosphere when dimmed and provides a functional lighting at full power.



SPECIFICATION SHEET

**Luminart®**

WWW.LUMINARTLIGHTING.COM  
Last updated: 02/24/20


# ROUND CONTROL

CEILING/WALL

TYPE:

PROJECT NAME:

## round control 2/4/6 base



distance from arms to ceiling: 4"

distance between each arm hole:  
4" on 4x arm base, 2.66" on 6x arm base

voltage	<b>120V</b>
gear	<b>incorporated (TRIAC)</b>
diameter	<b>120 mm (4.72")</b>
height	<b>160 mm (6.29")</b>

### order code base 2-arm

white	<b>T100H1DWL</b>
black	<b>T100H1DZL</b>


### order code base 4-arm

white	<b>T100H2DWL</b>
black	<b>T100H2DZL</b>

### order code base 6-arm

white	<b>T100H3DWL</b>
black	<b>T100H3DZL</b>

## round control arm 1




Ø230  
(Ø9.05")

lamp type	<b>LED</b>
colour temp.	<b>2700K</b>
max. watt	<b>13W</b>
voltage	<b>350mA</b>
class	<b>1</b>
gear	<b>not incorporated</b>
length	<b>370 mm (14.56")</b>
height	<b>230 mm (9.05")</b>

### order code

white	<b>T100P1DWL</b>
black	<b>T100P1DZL</b>

## round control arm 2




Ø230  
(Ø9.05")

lamp type	<b>LED</b>
colour temp.	<b>2700K</b>
max. watt	<b>13W</b>
voltage	<b>350mA</b>
class	<b>1</b>
gear	<b>not incorporated</b>
length	<b>510 mm (20.07")</b>
height	<b>230 mm (9.05")</b>

### order code

white	<b>T100P2DWL</b>
black	<b>T100P2DZL</b>

## round control arm 3




Ø230  
(Ø9.05")

lamp type	<b>LED</b>
colour temp.	<b>2700K</b>
max. watt	<b>13W</b>
voltage	<b>350mA</b>
class	<b>1</b>
gear	<b>not incorporated</b>
length	<b>660 mm (25.98")</b>
height	<b>230 mm (9.05")</b>

### order code

white	<b>T100P3DWL</b>
black	<b>T100P3DZL</b>

## round control arm 4




Ø230  
(Ø9.05")

lamp type	<b>LED</b>
colour temp.	<b>2700K</b>
max. watt	<b>13W</b>
voltage	<b>350mA</b>
class	<b>1</b>
gear	<b>not incorporated</b>
length	<b>810 mm (31.88")</b>
height	<b>230 mm (9.05")</b>

### order code

white	<b>T100P4DWL</b>
black	<b>T100P4DZL</b>

## round control arm 5



Ø230  
(Ø9.05")

lamp type	<b>LED</b>
colour temp.	<b>2700K</b>
max. watt	<b>13W</b>
voltage	<b>350mA</b>
class	<b>1</b>
gear	<b>not incorporated</b>
length	<b>960 mm (37.79")</b>
height	<b>230 mm (9.05")</b>

### order code

white	<b>T100P5DWL</b>
black	<b>T100P5DZL</b>



SPECIFICATION SHEET

## ORDERING INFO

Model (Order Code)

Voltage

Dimming

Please note:

277V is only compatible with 0-10V dimming

- 120V  
 277V

- LTE (Leading/Trailing Edge Dim)  
 010V (0-10V)



Installation note: Comes with a 4" backplate that mounts to a standard junction box

**Luminart**

WWW.LUMINARTLIGHTING.COM

Last updated: 02/24/20

# ROUND CONTROL



CEILING/WALL

TYPE:

PROJECT NAME:


## 2 arms example

round control 2

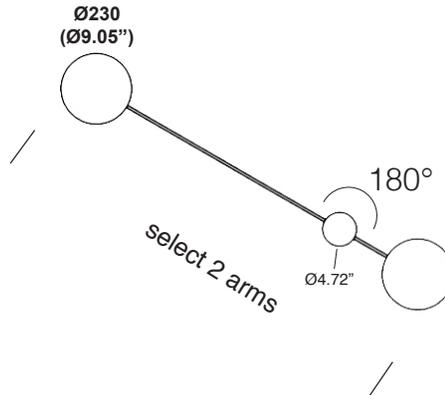



## 4 arms example

round control 4

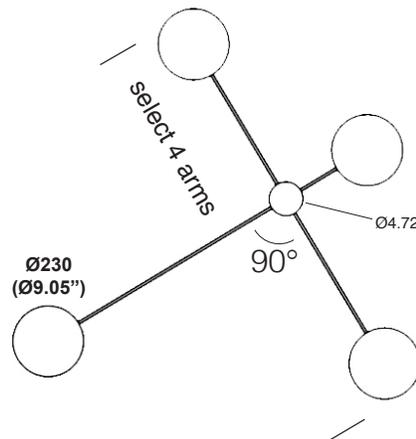

## 6 arms example

round control 6

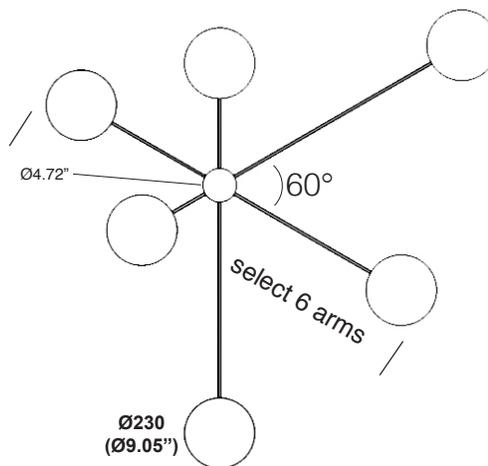

SPECIFICATION SHEET